

الكابلات السعودية
Saudi Cable



www.saudicable.com

BUILDING WIRES CATALOGUE



This catalogue provides essential technical information on Saudi Cable Company's products of Building Wires/cables, including PVC and XLPE insulations, and unarmored designs, single and multi-core cables, also THHN cables.

Each section covers technical details, relevant constructional data, electrical characteristics, and cable packing options, helping our customers to select the most suitable cables for their needs.



CONTENTS

BUILDING WIRES CATALOGUE

Constructional data:


- 1 Single Core, PVC, Copper (450/750 V)
- 4 Single Core, XLPE, Copper (600 V)
- 6 THHN Cable, Single Core, Nylon-Coated (600 V)
- 8 Multi-Core, PVC Insulated & Sheathed (300/500 V)
- 15 Flat Twin/Three, PVC Insulated & Sheathed

BUILDING WIRES ELECTRICAL CHARACTERISTICS

BUILDING WIRES PACKAGING OPTIONS




BUILDING WIRES

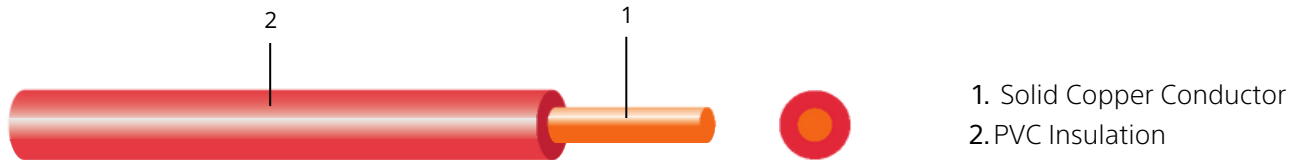

- 1. Solid Copper Conductor
- 2. PVC Insulation

BUILDING WIRES

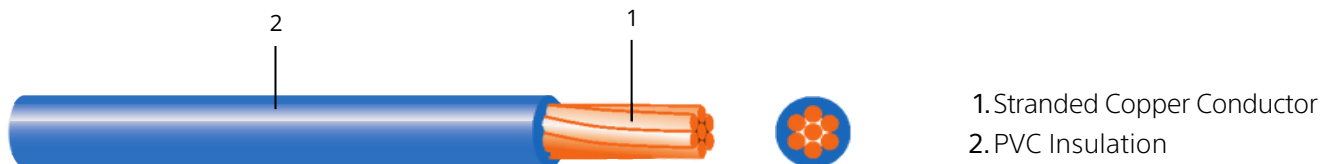

- 1. Stranded Copper Conductor
- 2. PVC Insulation

DESCRIPTION

Single core cables with solid or stranded copper conductors, PVC insulated, rated 450/750 V conforming to SASO:55 specification.

CONSTRUCTION

Conductor

Plain annealed circular copper conforming to IEC:60228, class 1 and 2 (also available in aluminium conductors sizes 16 to 630 mm²).

Insulation

PVC type 5 to BS:6746 rated 90°C, (PVC type 1 to BS:6746 rated 70°C also available).


APPLICATION

Typical applications include building wiring, equipment wiring, switching and distribution installations in conduits above or under plaster.

FEATURES

Insulation adheres tightly to conductors yet strips easily, leaving conductor clean. PVC insulation has good electrical properties.

Note: In the interests of product improvement, SCC reserve the right to alter cable specifications.

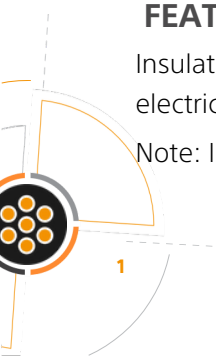




DIMENSIONS AND WEIGHTS

Conductor		Insulation		Packaging	
Nominal Cross Sectional Area (mm ²)	Minimum Number of wires	Nominal Thickness (mm)	Overall Diameter Approx (mm)	Net weight Approx (kg/km)	B- Box, S-Spool, D- Drum (m)
1.5 sd	1	0.7	2.8	19	50/100 B/S
1.5 rm	7	0.7	3	20	50/100 B/S
2.5 sd	1	0.8	3.3	29	50/100 B/S
2.5 rm	7	0.8	3.8	31	50/100 B/S
4 sd	1	0.8	3.9	45	50/100 B/S
4 rm	7	0.8	4.1	46	50/100 B/S
6 sd	1	0.8	4.4	64	50/100 B/S
6 rm	7	0.8	4.6	67	50/100 B/S
10 sd	1	1	5.6	106	50/100 C
10 rm	7	1	6	110	50/100 C
16 rm	7	1	7	171	50/100 C
25 rm	7	1.2	9	268	50/100 C
35 rm	7	1.2	10	361	1000/2000 D
50 rm	19	1.4	11.8	483	1000/2000 D
70 rm	19	1.4	13.4	680	1000/2000 D
95 rm	19	1.6	15.7	941	1000/2000 D
120 rm	37	1.6	17.3	1164	1000 D
150 rm	37	1.8	19.7	1400	1000 D
185 rm	37	2	21.5	1800	1000 D

SD: Solid Conductor RM: Round Multi-wire Conductor





DIMENSIONS AND WEIGHTS

Conductor		Insulation		Packaging	
Nominal Cross Sectional Area (mm ²)	Minimum Number of wires	Nominal Thickness (mm)	Overall Diameter Approx (mm)	Net weight Approx (kg/km)	B- Box, S-Spool, D- Drum (m)
240 rm	61	2.2	24.6	2380	1000 D
300 rm	61	2.4	27.6	2970	500 D
400 rm	61	2.6	30.6	3750	500 D


RM: Round Multi-wire Conductor

Please add the letter shown below for required colour:

A - Black, C - Blue, D - Brown, W - White, N - Orange, G - Green, H - Grey, R - Red, Y - Yellow,


J - Green/Yellow (Green/Yellow available for sizes up to and including 120 mm²).

Note: In the interests of product improvement, SCC reserve the right to alter cable specifications.

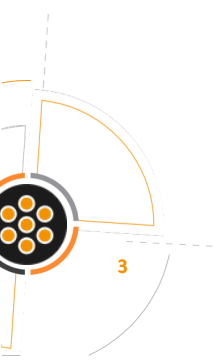



BUILDING WIRES

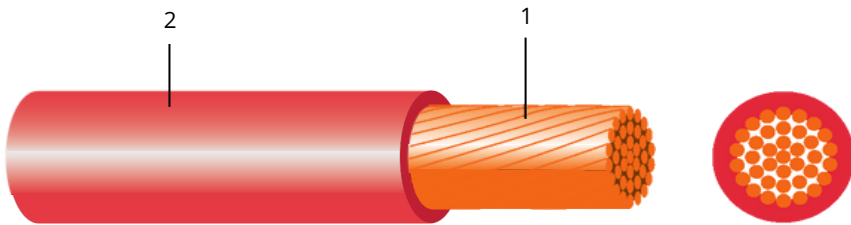

- 1. Stranded Copper Conductor
- 2. XLPE Insulation

DESCRIPTION

Single core cables with solid or stranded copper conductors, PVC insulated, rated 450/750 V conforming to SASO:55 specification.

CONSTRUCTION

Conductor

Plain annealed circular copper conforming to IEC:60228, class 1 and 2.

Insulation

XLPE (cross-linked polyethylene) rated 90°C.


APPLICATION

Typical applications include building wiring, equipment wiring, switching and distribution installations in conduits above or under plaster.

FEATURES

Insulation adheres tightly to conductors yet strips easily, leaving conductor clean. XLPE insulation has good electrical properties and resistance to moisture, oil and most chemicals.

Note: In the interests of product improvement, SCC reserve the right to alter cable specifications.






DIMENSIONS AND WEIGHTS

Conductor		Insulation		Packaging	
Nominal Cross Sectional Area (mm ²)	Minimum Number of wires	Nominal Thickness (mm)	Overall Diameter Approx (mm)	Net weight Approx (kg/km)	B- Box, S-Spool, D- Drum (m)
6	7	0.8	3.8	65	100 B/S
10	7	0.8	4.1	105	100 B/S
16	7	0.8	4.3	165	100 B/S
25	7	0.8	4.6	250	100 B/S
35	7	0.8	4.9	340	100 C
50	19	1	5.9	465	100 C
70	19	1	6.3	655	100 C
95	19	1	7.3	895	100 D
120	37	1.2	9	1135	100 D
150	37	1.2	10.1	1385	100 D
185	37	1.4	12	1720	100 D
240	61	1.4	13.8	2235	100 D
300	61	1.6	16	2820	500 D
400	61	1.6	17.6	3575	500 D
500	61	1.8	19.7	4560	500 D
630	61	2	22	5900	500 D



Please add the letter shown below for required colour:

A - Black, C -Blue, D - Brown, W - White, N - Orange, G - Green, H - Grey, R - Red, Y - Yellow.

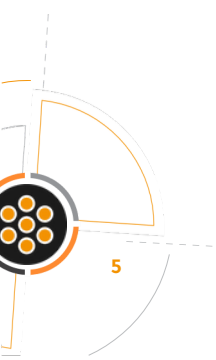



BUILDING WIRES

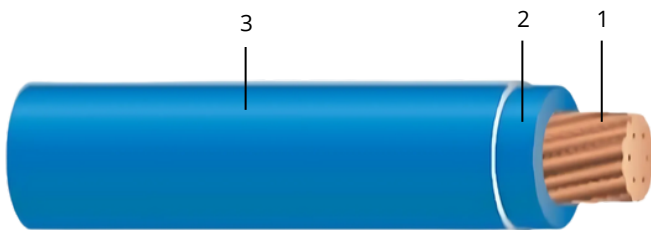

1. Solid or Stranded Copper Conductor
2. PVC Heat Resistant 90 °C Insulation
3. Nylon Jacket Material

DESCRIPTION

Single core cable, Plain copper conductor, Solid or stranded conductor, PVC heat resistant insulation, Nylon jacketed to UL 83 specification.

CONSTRUCTION

Conductor

Plain annealed high quality solid or stranded copper conductor to ASTM B3.

Insulation

PVC Heat Resistant 105°C grade.

Outer Jacket

Polyamide material, Nylon

APPLICATION

It is heat and oil resistant, so its typical applications include building wiring, equipment wiring, switching and distribution installations in conduits above or under plaster.

FEATURES

Insulation adheres tightly to conductors yet strips easily, leaving conductor clean. PVC insulation and Nylon jacket sustain good electrical properties, resistance to heat, oil and most chemicals.

Note: In the interests of product improvement, SCC reserve the right to alter cable specifications.





DIMENSIONS AND WEIGHTS

Conductor Size (AWG)	No. of Strands	Diameter of Solid/Strand Conductor Approx	THICKNESS						Outside Diameter
			PVC Insulation				Nylon Jacket Min. at any point		Approx
			Min.		Average				
		(mm)	(mils)	(mm)	(mils)	(mm)	(mils)	(mm)	(mm)
14	19	0.374	13	0.33	15	0.38	4	0.10	2.8
12	19	0.471	13	0.33	15	0.38	4	0.10	3.3
10	19	0.594	18	0.46	20	0.51	4	0.10	4.2
8	19	0.749	27	0.69	30	0.76	5	0.13	5.6
6	19	0.945	27	0.69	30	0.76	5	0.13	6.5


CURRENT CARRYING CAPACITY

Conductor Size (AWG)	No. of Strands	Equivalent in Metric	Conductor DC Resistance Maximum (20°C)		Current Carrying Capacity
		(mm ²)	(Ohm/km)		(Amp)
14	Solid	2.08	8.29	36	14
12	Solid	3.3	5.21	42	12
10	Solid	5.26	3.277	57	10
14	19	2.08	8.54	35	14
12	19	3.31	5.43	40	12





BUILDING WIRES

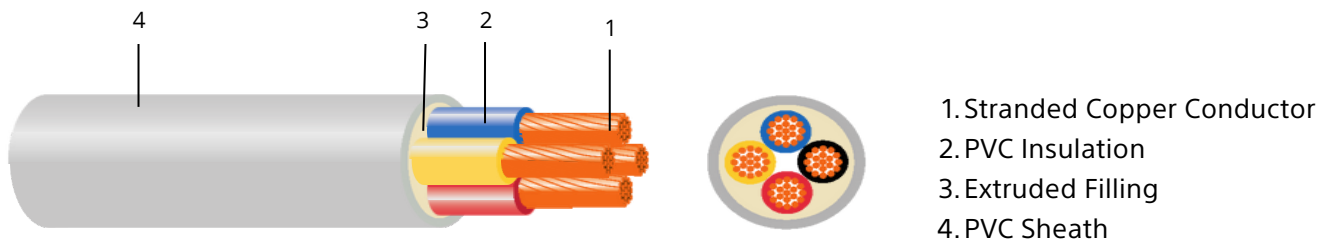

DESCRIPTION

Circular multi-core cable with solid or stranded copper conductor, PVC insulated and PVC sheathed. Cables are rated 300/500 V, conform to SASO:55 specification and similar to BS:6004-1984 specification.

CONSTRUCTION

Conductor

Plain annealed circular copper conforming to IEC:228 class 1 and 2.

Insulation

PVC type 5 to BS:6746 rated 85°C, (PVC type 1 to BS:6746 rated 70°C also available).

Assembly

Two, three or four insulated cores are laid up, filled with non-hygroscopic material and covered with an additional layer of extruded thermoplastic material which may be an integral part of the filling.

Sheath

PVC type ST2 to IEC:502, colour grey (black on request).

Colours for core identification

- Two cores - red and black
- Three cores - red, yellow and blue
- Four cores - red, yellow, blue and black

APPLICATION

Typical applications include fixed wiring, concealed in conduits or exposed on insulators, and in switching panels and distribution boards. These cables may be used in wet or dry locations and in outdoor applications.


Note: In the interests of product improvement, SCC reserve the right to alter cable specifications.



DIMENSIONS AND WEIGHTS

Conductor		Insulation	Outer sheath		Packaging		
Nominal Cross Sectional Area (mm ²)	Minimum Number of Wires	Nominal Thickness (mm)	Nominal Thickness (mm)	Overall Diameter Approx (mm)	Net Weight Approx (kg/km)	C - Coil D - Drum	Length (m)
Two Core							
1 sd	1	0.6	1.2	7.1	74	C	100
1.5 sd	1	0.7	1.2	8	97	C	100
2.5 sd	1	0.8	1.2	10.4	162	C	100
4 sd	1	0.8	1.2	11.3	207	C	100
6 sd	1	0.8	1.2	12.5	265	C	100
10 sd	1	1	1.4	14.7	397	D	1000/2000
1.5 rm	7	0.8	1.2	9	117	C	100
2.5 rm	7	0.8	1.2	10.1	159	C	100
4 rm	7	0.8	1.2	11	200	C	100
6 rm	7	0.8	1.2	12.3	262	C	100
10 rm	7	1	1.4	14.3	390	D	1000/2000
16 rm	7	1	1.4	16.3	546	D	1000/2000
25 rm	7	1.2	1.4	19.4	815	D	1000
35 rm	19	1.2	1.6	21.9	1080	D	1000

SD: Solid Conductor RM: Round Multi-wire Conductor

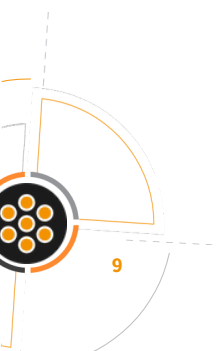




DIMENSIONS AND WEIGHTS

Conductor		Insulation	Outer sheath		Packaging		
Nominal Cross Sectional Area (mm ²)	Minimum Number of Wires	Nominal Thickness (mm)	Nominal Thickness (mm)	Overall Diameter Approx (mm)	Net Weight Approx (kg/km)	C - Coil D - Drum	Length (m)
Three Core							
1 sd	1	0.6	1.2	7.6	90	C	50/100
1.5 sd	1	0.7	1.2	8.5	118	C	50/100
2.5 sd	1	0.8	1.2	11.1	196	C	50/100
4 sd	1	0.8	1.2	12.1	255	C	50/100
6 sd	1	0.8	1.2	13.4	332	C	50/100
10 sd	1	1	1.4	15.8	504	D	1000/2000
1.5 rm	7	0.8	1.2	10	148	C	50/100
2.5 rm	7	0.8	1.2	11.3	201	C	50/100
4 rm	7	0.8	1.2	12.3	262	C	50/100
6 rm	7	0.8	1.2	13.6	341	C	50/100
10 rm	7	1	1.4	16	512	D	1000/2000
16 rm	7	1	1.4	18.1	722	D	1000/2000
25 rm	7	1.2	1.4	21.5	1078	D	1000
35 rm	19	1.2	1.6	23.8	1401	D	1000

SD: Solid Conductor RM: Round Multi-wire Conductor






DIMENSIONS AND WEIGHTS

Conductor		Insulation	Outer sheath		Packaging		
Nominal Cross Sectional Area (mm ²)	Minimum Number of Wires	Nominal Thickness (mm)	Nominal Thickness (mm)	Overall Diameter Approx (mm)	Net Weight Approx (kg/km)	C - Coil D - Drum	Length (m)
Four core							
1 sd	1	0.6	1.2	8	107	C	50/100
1.5 sd	1	0.7	1.2	9.1	142	C	50/100
2.5 sd	1	0.8	1.2	11.8	235	C	50/100
4 sd	1	0.8	1.2	12.9	309	C	50/100
6 sd	1	0.8	1.2	14.3	406	C	50/100
10 sd	1	1	1.4	17	622	D	1000/2000
1.5 rm	7	0.8	1.2	10.7	198	C	50/100
2.5 rm	7	0.8	1.2	12.2	266	C	50/100
4 rm	7	0.8	1.2	13.4	345	C	50/100
6 rm	7	0.8	1.2	14.8	448	C	50/100
10 rm	7	1	1.4	17.5	670	D	1000/2000
16 rm	7	1	1.4	19.8	942	D	1000/2000
25 rm	7	1.2	1.4	23.6	1400	D	1000
35 rm	19	1.2	1.6	26.1	1833	D	1000

SD: Solid Conductor RM: Round Multi-wire Conductor






DIMENSIONS AND WEIGHTS

Conductor		Insulation	Outer sheath		Packaging		
Nominal Cross Sectional Area (mm ²)	Minimum Number of Wires	Nominal Thickness (mm)	Nominal Thickness (mm)	Overall Diameter Approx (mm)	Net Weight Approx (kg/km)	C - Coil D - Drum	Length (m)
Two Core							
1 sd	1	0.6	1.2	7.1	72	C	100
1.5 sd	1	0.7	1.2	8	94	C	100
2.5 sd	1	0.8	1.2	8.8	108	C	100
4 sd	1	0.8	1.2	9.7	140	C	100
6 sd	1	0.8	1.2	10.7	184	C	100
10 sd	1	1	1.4	13.1	279	D	1000/2000
1.5 rm	7	0.8	1.2	8.3	99	C	100
2.5 rm	7	0.8	1.2	9.1	128	C	100
4 rm	7	0.8	1.2	10.1	170	C	100
6 rm	7	0.8	1.2	11.5	227	C	100
10 rm	7	1	1.4	12.7	326	D	1000/2000
16 rm	7	1	1.4	14.7	464	D	1000/2000
25 rm	7	1.2	1.4	17	691	D	1000
35 rm	19	1.2	1.6	19.9	945	D	1000

SD: Solid Conductor RM: Round Multi-wire Conductor






DIMENSIONS AND WEIGHTS

Conductor		Insulation	Outer sheath		Packaging		
Nominal Cross Sectional Area (mm ²)	Minimum Number of Wires	Nominal Thickness (mm)	Nominal Thickness (mm)	Overall Diameter Approx (mm)	Net Weight Approx (kg/km)	C - Coil D - Drum	Length (m)
Three Core							
1 sd	1	0.6	1.2	7.4	82	C	50/100
1.5 sd	1	0.7	1.2	8.4	107	C	50/100
2.5 sd	1	0.8	1.2	9.3	119	C	50/100
4 sd	1	0.8	1.2	10.3	157	C	50/100
6 sd	1	0.8	1.2	11.6	213	C	50/100
10 sd	1	1	1.4	13.9	318	D	1000/2000
1.5 rm	7	0.8	1.2	9.5	119	C	50/100
2.5 rm	7	0.8	1.2	10.4	156	C	50/100
4 rm	7	0.8	1.2	11.5	211	C	50/100
6 rm	7	0.8	1.2	12.8	284	C	50/100
10 rm	7	1	1.4	14.3	414	D	1000/2000
16 rm	7	1	1.4	16.4	606	D	1000/2000
25 rm	7	1.2	1.4	18.9	898	D	1000
35 rm	19	1.2	1.6	22	1225	D	1000

SD: Solid Conductor RM: Round Multi-wire Conductor






DIMENSIONS AND WEIGHTS


Conductor		Insulation	Outer sheath		Packaging		
Nominal Cross Sectional Area (mm ²)	Minimum Number of Wires	Nominal Thickness (mm)	Nominal Thickness (mm)	Overall Diameter Approx (mm)	Net Weight Approx (kg/km)	C - Coil D - Drum	Length (m)
Four core							
1 sd	1	0.6	1.2	8	99	C	50/100
1.5 sd	1	0.7	1.2	9.1	135	C	50/100
2.5 sd	1	0.8	1.2	10.2	153	C	50/100
4 sd	1	0.8	1.2	11.3	206	C	50/100
6 sd	1	0.8	1.2	12.5	279	C	50/100
10 sd	1	1	1.4	15.3	423	D	1000/2000
1.5 rm	7	0.8	1.2	10.7	169	C	50/100
2.5 rm	7	0.8	1.2	11.7	200	C	50/100
4 rm	7	0.8	1.2	12.9	267	C	50/100
6 rm	7	0.8	1.2	14.3	353	C	50/100
10 rm	7	1	1.4	16	513	D	1000/2000
16 rm	7	1	1.4	18.4	744	D	1000/2000
25 rm	7	1.2	1.4	22.2	1142	D	1000
35 rm	19	1.2	1.6	24.7	1489	D	1000

SD: Solid Conductor RM: Round Multi-wire Conductor





BUILDING WIRES

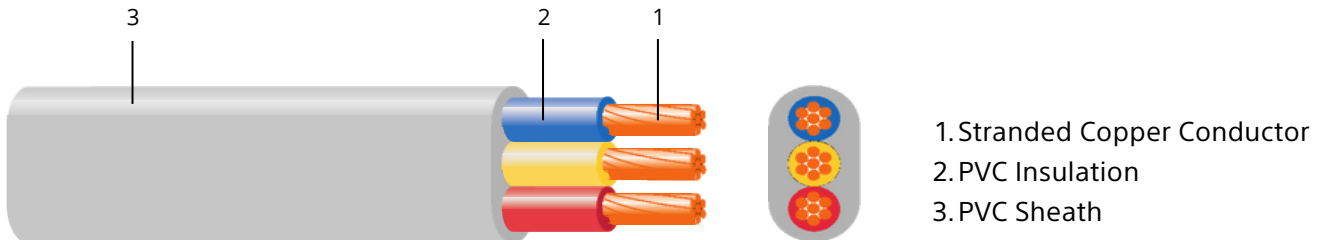

DESCRIPTION

Flat twin and flat three core cables with solid or stranded copper conductors, PVC insulated and PVC sheathed, are rated 300/500 V, conform to SASO:55 specification and similar to BS:6004-1984 specification.

CONSTRUCTION

Conductor

Plain annealed circular copper conforming to IEC:228, class 1 and 2.

Insulation

PVC to BS:60363 rated 90°C, (PVC rated 70°C also available).

Assembly

Two or three insulated conductors are laid parallel with or without a bare copper conductor for earth continuity.

Sheath

PVC type ST2 to IEC:502, colour grey (black on request).

Colours for core

Colours for core identification

Two core - red and black

Three core - red, yellow and blue

APPLICATION

These cables are suitable for operation at voltages up to and including 300 Vrms to earth and 500 Vrms between conductors. Typical applications include indoor and outdoor wiring of residential and commercial buildings, warehouses and shops.

Note: In the interests of product improvement, SCC reserve the right to alter cable specifications.





DIMENSIONS AND WEIGHTS

Conductor			Insulation	Outer sheath		Packaging		
Nominal Cross Sectional Area (mm ²)	Minimum Number of Wires	Earth Cont. Cond. (no.xmm)	Nominal Thickness (mm)	Nominal Thickness (mm)	Overall Diameter Approx (mmxmm)	Net Weight Approx (mm)	C - Coil D - Drum	Length (m)
Two Core	(Without Earth Continuity Conductor)							
1.5 sd	1	-	0.7	0.9	8.4x5.4	62	C	50/100
2.5 sd	1	-	0.8	1	9.8x6.2	94	C	50/100
4 rm	7	-	0.8	1	11.5x7.2	142	C	50/100
6 rm	7	-	0.8	1.1	13.0x8.0	194	C	50/100
10 rm	7	-	1.0	1.2	16.0x9.6	310	C	50/100
16 rm	7	-	1.0	1.3	18.5x11.0	450	D	1000/2000
Three Core	(Without Earth Continuity Conductor)							
1.5 sd	1	-	0.7	0.9	11.5x5.4	90	C	50/100
2.5 sd	1	-	0.8	1	13.5x6.2	137	C	50/100
4 rm	7	-	0.8	1	16.5x7.4	216	C	50/100
6 rm	7	-	0.8	1.1	18.0x8.0	287	C	50/100
10 rm	7	-	1.0	1.2	22.5x9.6	461	D	1000/2000
16 rm	7	-	1.0	1.3	26.5x11.0	672	D	1000/2000

SD: Solid Conductor RM: Round Multi-wire Conductor





DIMENSIONS AND WEIGHTS

Conductor			Insulation	Outer sheath		Packaging		
Nominal Cross Sectional Area (mm ²)	Minimum Number of Wires	Earth Cont. Cond. (no.xmm)	Nominal Thickness (mm)	Nominal Thickness (mm)	Overall Diameter Approx (mmxmm)	Net Weight Approx (mm)	C - Coil D - Drum	Length (m)
Two Core	(With Earth Continuity Conductor)							
1.5 sd	1	1x1.13	0.7	0.9	9.6x5.4	77	C	50/100
2.5 sd	1	1x1.13	0.8	1	11.0x6.2	110	C	50/100
4 rm	7	1x1.38	0.8	1	13.0x7.2	166	C	50/100
6 rm	7	1x1.78	0.8	1.1	15.0x8.0	231	C	50/100
10 rm	7	7x0.84	1.0	1.2	19.0x9.6	371	D	1000/2000
16 rm	7	7x1.02	1.0	1.3	22.0x11.0	538	D	1000/2000
Three Core	(With Earth Continuity Conductor)							
1.5 sd	1	1x1.13	0.7	0.9	12.5x5.4	105	C	50/100
2.5 sd	1	1x1.13	0.8	1	14.5x6.2	153	C	50/100
4 rm	7	1x1.38	0.8	1	18.0x7.4	250	C	50/100
6 rm	7	1x1.78	0.8	1.1	20.0x8.0	325	C	50/100
10 rm	7	7x0.84	1.0	1.2	25.5x9.6	522	D	1000/2000
16 rm	7	7x1.02	1.0	1.3	29.5x11.0	760	D	1000/2000

SD: Solid Conductor RM: Round Multi-wire Conductor






BUILDING WIRES ELECTRICAL CHARACTERISTICS



CURRENT CARRYING CAPACITY

Conductor	Conductor Resistance			Current Carrying Capacity		
Nominal Cross sectional area (mm ²)	DC at 20°C Maximum (ohm/km)	AC at 90°C in flat formation	AC at 90°C in trefoil formation	In Air		
		 Approx (ohm/km)	 Approx (ohm/km)	 Approx amps	 Approx amps	 Approx amps
1.5	12.1	14.5	14.5	19	17	17
2.5	7.41	8.87	8.87	27	23	21
4	4.61	5.52	5.52	36	31	29
6	3.08	3.69	3.69	46	40	37
10	1.83	2.19	2.19	63	56	50
16	1.15	1.38	1.38	85	65	65
25	0.727	0.87	0.87	112	87	87
35	0.524	0.627	0.628	138	108	109
50	0.387	0.463	0.464	168	133	127
70	0.268	0.321	0.322	213	170	160
95	0.193	0.232	0.233	258	213	210
120	0.153	0.184	0.186	299	249	245
150	0.124	0.15	0.151	344	287	284
185	0.0991	0.12	0.122	395	333	315
240	0.0754	0.0924	0.095	474	397	383
300	0.0601	0.0746	0.0779	550	458	450
400	0.047	0.0596	0.0637	644	531	535
500	0.0366	0.047	0.052	752	610	640
630	0.0283	0.039	0.0445	888	705	700

Note: inner diameter of pipe is assumed to be 1.5 x diameter over cable assembly.






CURRENT CARRYING CAPACITY

Conductor	Conductor Resistance			Current Carrying Capacity		
Nominal Cross sectional area (mm ²)	DC at 20°C Maximum (ohm/km)	AC at 90°C in flat formation	AC at 90°C in trefoil formation	In Air		
		 Approx (ohm/km)	 Approx (ohm/km)	 Free Approx amps	 Free Approx amps	 In pipes Approx amps
1.5	12.1	15.2	15.2	21	18	16
2.5	7.41	9.3	9.3	29	24	22
4	4.6	5.79	5.79	39	33	28
6	3.08	3.87	3.87	50	42	36
10	1.83	2.3	2.3	71	60	50
16	1.15	1.44	1.44	96	81	66
25	0.727	0.913	0.913	128	109	87
35	0.524	0.658	0.658	159	135	107
50	0.387	0.486	0.486	197	167	130
70	0.268	0.337	0.338	252	213	164
95	0.193	0.243	0.244	315	267	203
120	0.153	0.193	0.194	369	312	235
150	0.124	0.157	0.159	424	359	268
185	0.0991	0.126	0.128	494	417	310
240	0.0754	0.0967	0.0993	592	497	366
300	0.0601	0.078	0.0812	688	575	420
400	0.047	0.0623	0.0662	805	667	482
500	0.0366	0.05	0.0547	940	768	550
630	0.0283	0.0413	0.0463	1100	888	627

Note: inner diameter of pipe is assumed to be 1.5 x diameter over cable assembly.

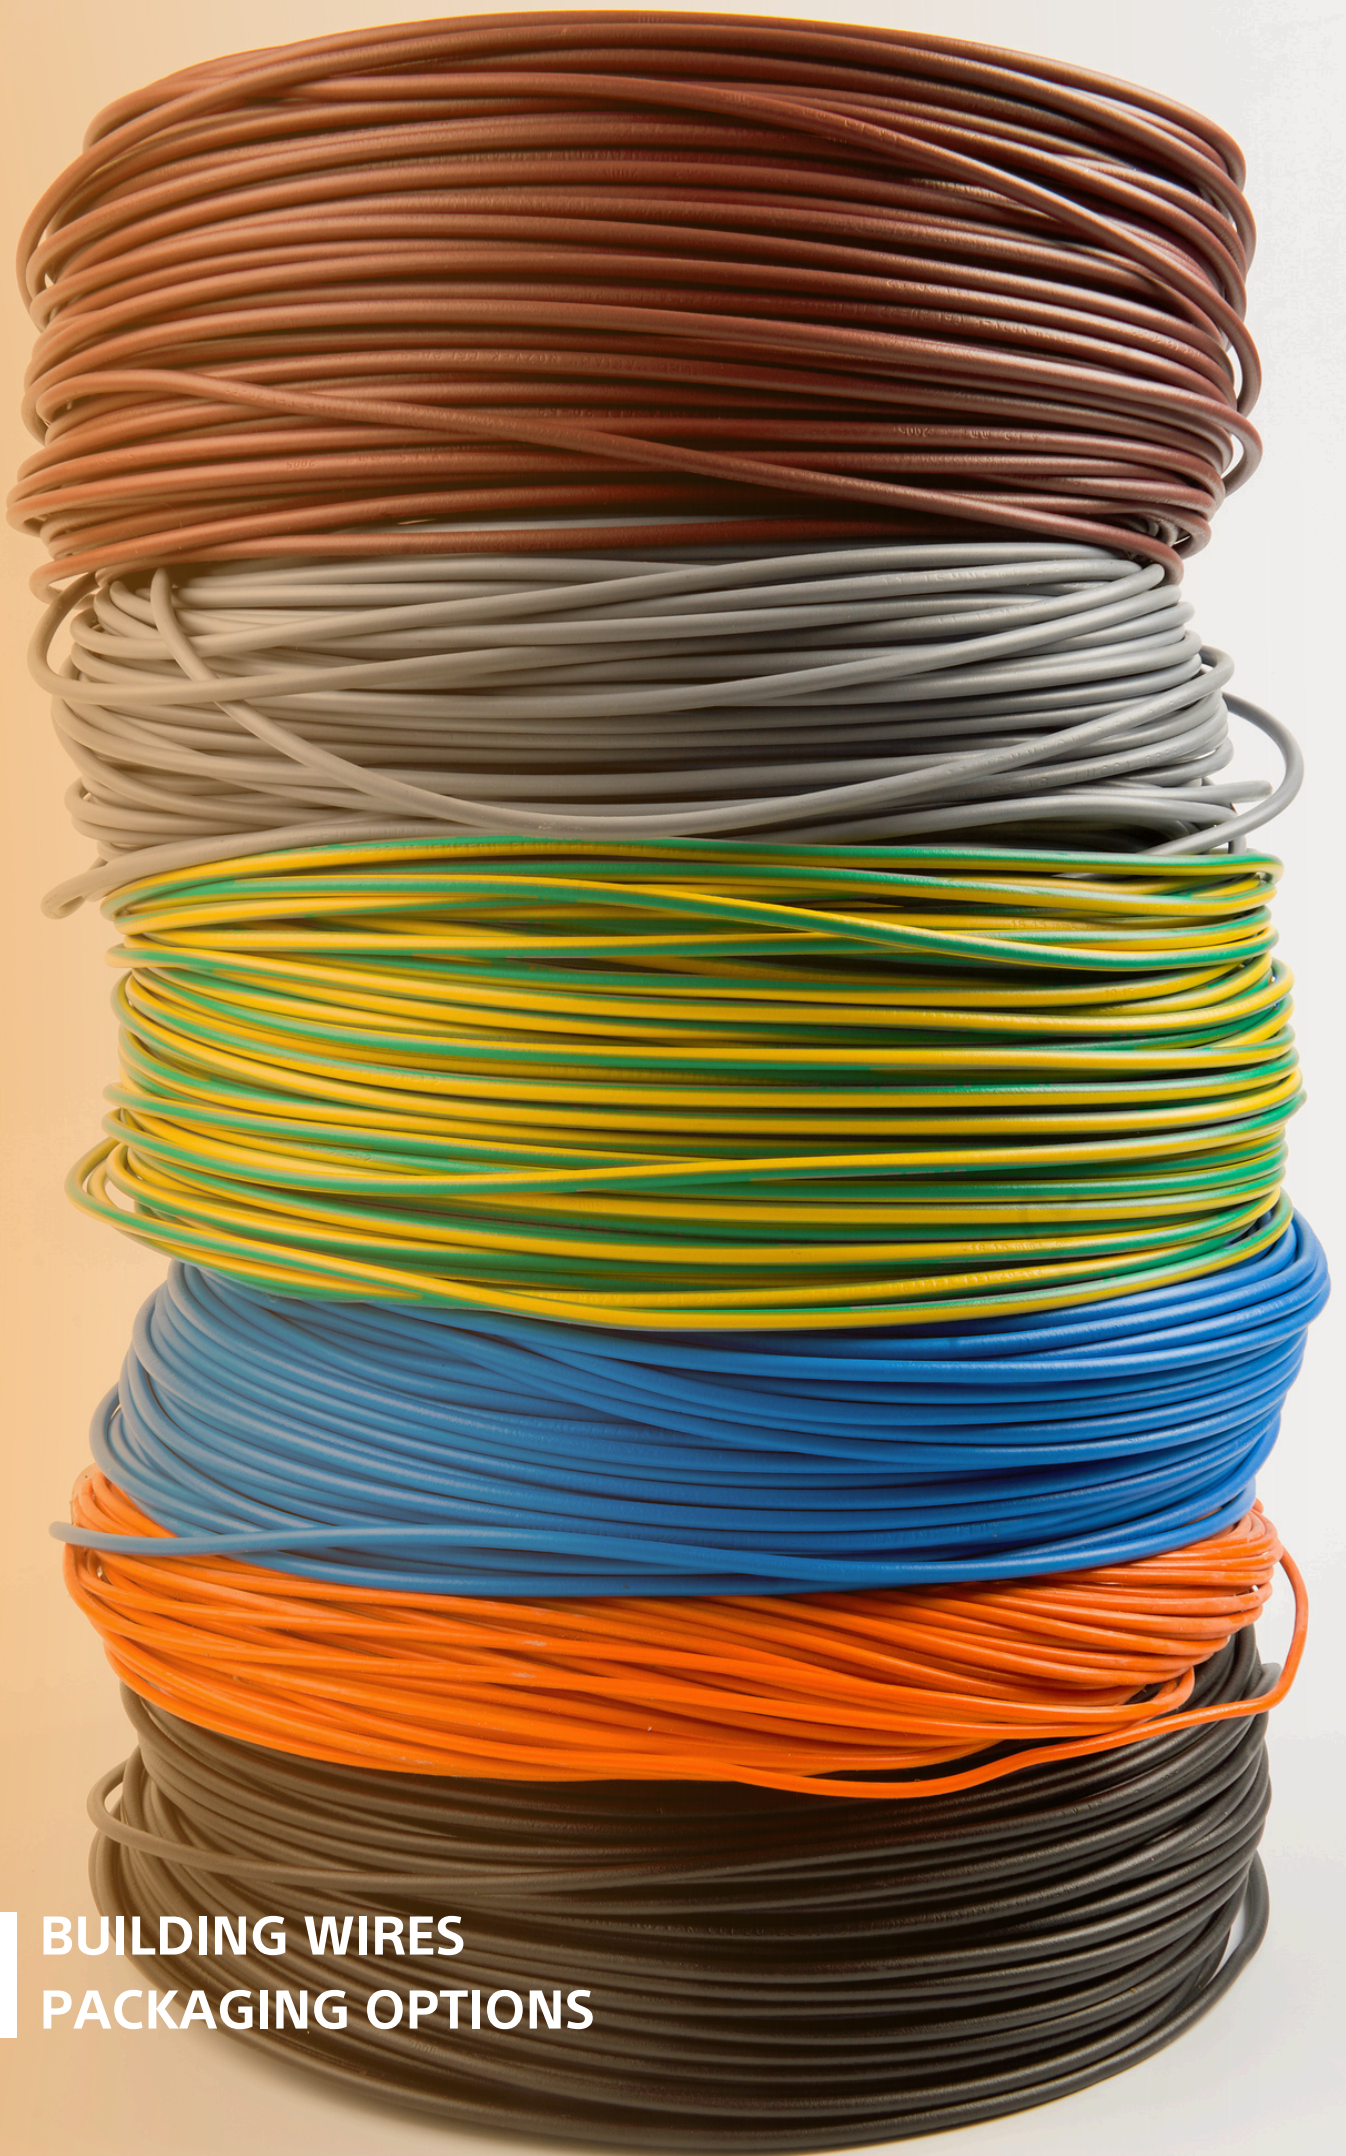

BUILDING WIRES
PACKAGING OPTIONS




SCC building wires are supplied in several packaging types to suit a range of different project applications. These include spools,

coils and drums as well as easy-pull cable reel dispensers to reduce the time and cost of installation on site. Some cables are offered in a choice of packaging allowing you to select the most appropriate option to suit your individual requirements. Standard packaging and packaging options are indicated by a letter code in the product specifications tables. However, please note that alternative packaging can also be supplied on request. Please contact our technical department for details.

Packaging Code D
Single core 10mm²
to 25mm².



Flat twin, flat three
and multicore
building wires.



Packaging Code C
Coils (spools plastic
wrapped).

Single core 10mm²
to 25mm².


Flat twin, flat three
and multicore.

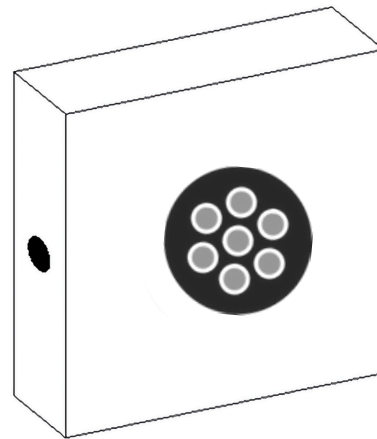

Packaging Code B
Coil in carton box.


Single core

1.5mm²
to 6mm².

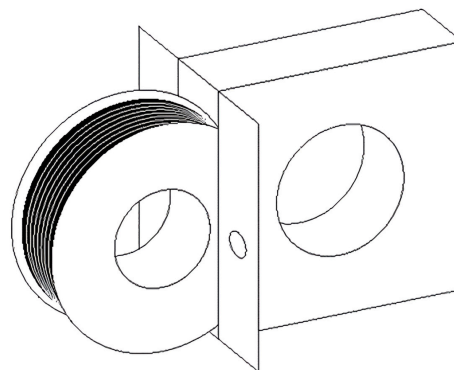

Packaging Code S
Superior easy pull
package - a spool
within a box.

Single core 1.5mm²
to 6mm².





الكابلات السعودية
Saudi Cable



@saudicable



@saudicableco



@Saudi Cable



@Saudi Cable Company



920005088

www.saudicable.com